
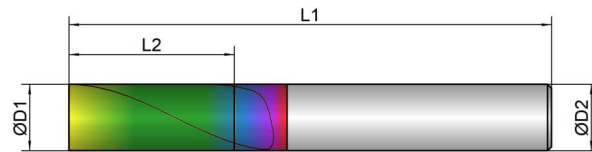


Kühlung	
Toleranz	h10
Beschichtung	TAC- $\alpha$

HA

**NEW**

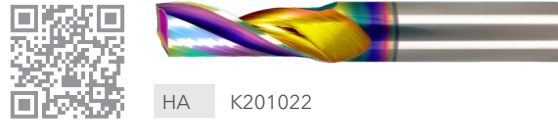

Stahl			Gehärteter Stahl				INOX (VA)	Guss	NE-Werkstoffe				Inconel	Abrasivmaterial		Titan
< 850 N/mm	< 1100 N/mm	< 1400 N/mm	< 55 HRC	< 60 HRC	< 67 HRC	< 70 HRC			Alu	Kupfer	Mg	Kunststoffe		CFK / GFK	Grafit	
									430			480				

K201022	D1  mm Ø	L2  mm	L1  mm	D2  mm Ø	z  #	 °
1	1,0	4,0	50,0	3,0	1	30
1,5	1,5	6,0	50,0	3,0	1	30
2	2,0	8,0	50,0	3,0	1	30
3	3,0	12,0	50,0	3,0	1	30
4	4,0	15,0	54,0	4,0	1	30
5	5,0	17,0	54,0	5,0	1	30
6	6,0	20,0	65,0	6,0	1	30
8	8,0	22,0	63,0	8,0	1	30
10	10,0	25,0	72,0	10,0	1	30
12	12,0	30,0	83,0	12,0	1	30