

Kühlung	
Toleranz	e8
Beschichtung	-

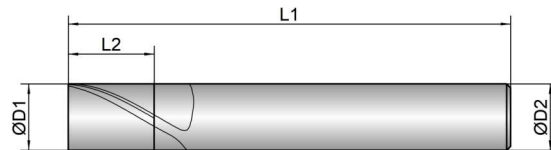
HA HB UNI



HA K201031









HB K201032



Stahl			Gehärteter Stahl				INOX (VA)	Guss	NE-Werkstoffe				Inconel	Abrasivmaterial		Titan
< 850 N/mm	< 1100 N/mm	< 1400 N/mm	< 55 HRC	< 60 HRC	< 67 HRC	< 70 HRC			Alu	Kupfer	Mg	Kunststoffe		CFK / GFK	Grafit	
60	40	30					45	60	140							

K201031	K201032	D1  mm ø	L2  mm	L1  mm	D2  mm ø	z  #	 °
0,25/3	-	0,25	0,5	38,0	3,0	2	30
0,3/3	-	0,3	1,0	38,0	3,0	2	30
0,35/3	-	0,35	1,0	38,0	3,0	2	30
0,4/3	-	0,4	1,0	38,0	3,0	2	30
0,5/3	-	0,5	1,5	38,0	3,0	2	30
0,6/3	-	0,6	1,5	38,0	3,0	2	30
0,7/3	-	0,7	2,0	38,0	3,0	2	30
0,8/3	-	0,8	2,0	38,0	3,0	2	30
0,9/3	-	0,9	2,5	38,0	3,0	2	30
1/3	-	1,0	3,0	50,0	3,0	2	30
1,1/3	-	1,1	3,0	50,0	3,0	2	30
1,2/3	-	1,2	4,0	50,0	3,0	2	30

VHM Schaftfräser kurz | K201031 / K201032

K201031	K201032	D1  mm ∅	L2  mm	L1  mm	D2  mm ∅	z  #	 °
1,4/3	-	1,4	4,0	50,0	3,0	2	30
1,5/6	1,5	1,5	3,0	54,0	6,0	2	30
1,5/3	-	1,5	4,0	50,0	3,0	2	30
1,6/3	-	1,6	4,0	50,0	3,0	2	30
1,8/3	-	1,8	5,0	50,0	3,0	2	30
2/6	2	2,0	4,0	54,0	6,0	2	30
2/3	-	2,0	5,0	50,0	3,0	2	30
2,5/3	-	2,5	6,0	50,0	3,0	2	30
3/6	3	3,0	6,0	54,0	6,0	2	30
4/6	4	4,0	7,0	54,0	6,0	2	30
5/6	5	5,0	8,0	54,0	6,0	2	30
6/6	6	6,0	10,0	54,0	6,0	2	30
8/8	8	8,0	12,0	59,0	8,0	2	30
10/10	10	10,0	13,0	67,0	10,0	2	30
12/12	12	12,0	16,0	74,0	12,0	2	30
14/14	14	14,0	16,0	75,0	14,0	2	30
16/16	16	16,0	20,0	83,0	16,0	2	30
18/18	18	18,0	20,0	85,0	18,0	2	30
20/20	20	20,0	25,0	93,0	20,0	2	30