









Kühlung	
Toleranz	e8
Beschichtung	-

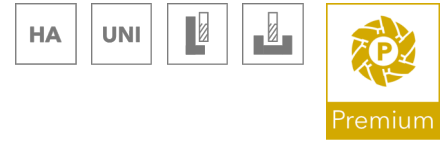

HA K201081

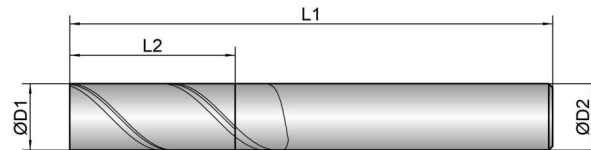

Stahl			Gehärteter Stahl				INOX (VA)	Guss	NE-Werkstoffe				Inconel	Abrasivmaterial		Titan
< 850 N/mm	< 1100 N/mm	< 1400 N/mm	< 55 HRC	< 60 HRC	< 67 HRC	< 70 HRC			Alu	Kupfer	Mg	Kunststoffe		CFK / GFK	Grafit	
60	40	30					45	60	140							

K201081	D1  mm ∅	L2  mm	L1  mm	D2  mm ∅	z  #	 °
2	2,0	7,0	32,0	2,0	2	45
3	3,0	10,0	38,0	3,0	2	45
4	4,0	13,0	40,0	4,0	2	45
5	5,0	15,0	58,0	6,0	2	45
6	6,0	16,0	58,0	6,0	2	45
7	7,0	20,0	70,0	8,0	2	45
8	8,0	22,0	70,0	8,0	2	45
9	9,0	22,0	73,0	10,0	2	45
10	10,0	25,0	73,0	10,0	2	45
12	12,0	28,0	84,0	12,0	2	45
14	14,0	30,0	84,0	14,0	2	45
16	16,0	35,0	93,0	16,0	2	45
18	18,0	35,0	101,0	18,0	2	45
20	20,0	40,0	104,0	20,0	2	45