


Kühlung	
Toleranz	e8
Beschichtung	TAC- $\alpha$

HA	HSC	HPC	MTC		
----	-----	-----	-----	--	--



HA K201143

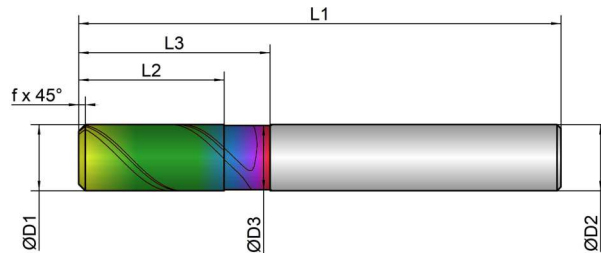

Stahl			Gehärteter Stahl				INOX (VA)	Guss	NE-Werkstoffe				Inconel	Abrasivmaterial		Titan
< 850 N/mm	< 1100 N/mm	< 1400 N/mm	< 55 HRC	< 60 HRC	< 67 HRC	< 70 HRC			Alu	Kupfer	Mg	Kunststoffe		CFK / GFK	Grafit	
								520					140	290		

K201143	D1  mm ø	D3  mm ø	L2  mm	L3  mm	L1  mm	D2  mm ø	z  #	 mm	 °
2	2,0	1,9	8,0	16,0	58,0	6,0	2	0,05	45
3	3,0	2,9	8,0	18,0	58,0	6,0	2	0,10	45
4	4,0	3,9	11,0	18,0	58,0	6,0	2	0,10	45
5	5,0	4,9	13,0	20,0	58,0	6,0	2	0,10	45
6	6,0	5,9	13,0	20,0	58,0	6,0	2	0,10	45
8	8,0	7,7	19,0	26,0	64,0	8,0	2	0,10	45
10	10,0	9,7	22,0	29,0	73,0	10,0	2	0,10	45
11	11,0	10,7	24,0	34,0	84,0	12,0	2	0,10	45
12	12,0	11,7	26,0	36,0	84,0	12,0	2	0,10	45
14	14,0	13,7	26,0	36,0	84,0	14,0	2	0,10	45
16	16,0	15,5	32,0	42,0	93,0	16,0	2	0,10	45
18	18,0	17,5	32,0	42,0	93,0	18,0	2	0,10	45
20	20,0	19,5	38,0	52,0	104,0	20,0	2	0,10	45