

Kühlung	
Toleranz	e8
Beschichtung	-

HA

HB

UNI

NEW


Basic



HA K201271



HB K201272

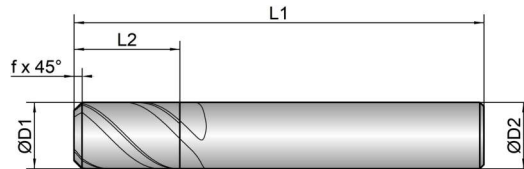

Stahl			Gehärteter Stahl				INOX (VA)	Guss	NE-Werkstoffe				Inconel	Abrasivmaterial		Titan
< 850 N/mm	< 1100 N/mm	< 1400 N/mm	< 55 HRC	< 60 HRC	< 67 HRC	< 70 HRC			Alu	Kupfer	Mg	Kunststoffe		CFK / GFK	Grafit	
70	45	30					60	65	200	160						

K201271	K201272	D1	L2	L1	D2	z	45°	°
		 mm ø	 mm	 mm	 mm ø	 #		
1/6	1/6	1,0	2,0	45,0	6,0	3	0,02	45
1,5/6	1,5/6	1,5	3,0	45,0	6,0	3	0,03	45
2/6	2/6	2,0	4,0	45,0	6,0	3	0,03	45
2,5/6	2,5/6	2,5	5,0	45,0	6,0	3	0,03	45
3/6	3/6	3,0	6,0	45,0	6,0	3	0,03	45
3,5/6	3,5/6	3,5	6,0	45,0	6,0	3	0,03	45
4/6	4/6	4,0	7,0	45,0	6,0	3	0,04	45
4,5/6	4,5/6	4,5	8,0	45,0	6,0	3	0,04	45
5/6	5/6	5,0	8,0	45,0	6,0	3	0,04	45
5,5/6	5,5/6	5,5	8,0	45,0	6,0	3	0,04	45
6/6	6/6	6,0	10,0	45,0	6,0	3	0,04	45
8/8	8/8	8,0	13,0	55,0	8,0	3	0,05	45
10/10	10/10	10,0	16,0	55,0	10,0	3	0,05	45