


Kühlung	
Toleranz	e8
Beschichtung	-



HA K201411



HB K201412

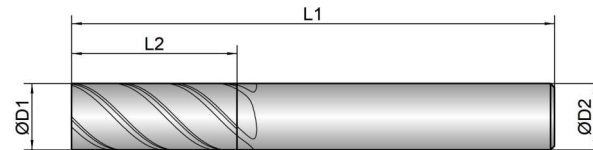

Stahl			Gehärteter Stahl				INOX (VA)	Guss	NE-Werkstoffe				Inconel	Abrasivmaterial		Titan
< 850 N/mm	< 1100 N/mm	< 1400 N/mm	< 55 HRC	< 60 HRC	< 67 HRC	< 70 HRC			Alu	Kupfer	Mg	Kunststoffe		CFK / GFK	Grafit	
60	40	30					45	60	140							

K201411	K201412	D1	L2	L1	D2	z	°
		mm Ø	mm	mm	mm Ø	#	
3	3	3,0	10,0	58,0	6,0	4	45
4	4	4,0	13,0	58,0	6,0	4	45
5	5	5,0	15,0	58,0	6,0	4	45
6	6	6,0	16,0	58,0	6,0	4	45
8	8	8,0	22,0	64,0	8,0	4	45
10	10	10,0	25,0	73,0	10,0	4	45
12	12	12,0	28,0	84,0	12,0	4	45
14	14	14,0	30,0	84,0	14,0	4	45
16	16	16,0	36,0	93,0	16,0	4	45
18	18	18,0	36,0	93,0	18,0	4	45
20	20	20,0	41,0	104,0	20,0	4	45
25	25	25,0	50,0	125,0	25,0	4	45