


Kühlung	
Toleranz	-
Beschichtung	-



HA K204061

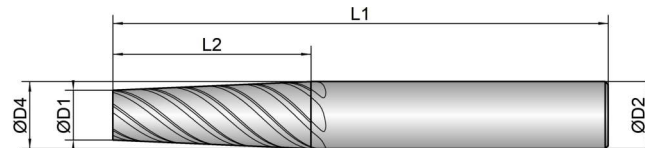

Stahl			Gehärteter Stahl				INOX (VA)	Guss	NE-Werkstoffe				Inconel	Abrasivmaterial		Titan
< 850 N/mm	< 1100 N/mm	< 1400 N/mm	< 55 HRC	< 60 HRC	< 67 HRC	< 70 HRC			Alu	Kupfer	Mg	Kunststoffe		CFK / GFK	Grafit	
●	●						●	●	●							

K204061	D1 mm ∅	D4 mm ∅	L2 mm	L1 mm	D2 mm ∅	z #	 °
2X10	2,0	4	10,0	50,0	4,0	4	30
2,5X10	2,5	4	10,0	50,0	4,0	4	30
2,5X20	2,5	6	20,0	65,0	6,0	4	30
3X25	3,0	6	25,0	70,0	6,0	4	30
3X30	3,0	8	30,0	75,0	8,0	4	30
3X40	3,0	8	40,0	85,0	8,0	4	30
4X25	4,0	8	25,0	70,0	8,0	6	45
4X30	4,0	8	30,0	75,0	8,0	6	45
5X40	5,0	10	40,0	90,0	10,0	6	45
6X30	6,0	10	30,0	80,0	10,0	6	45
8X30	8,0	12	30,0	84,0	12,0	6	45
8X50	8,0	14	50,0	110,0	14,0	6	45
10X30	10,0	14	30,0	84,0	14,0	6	45
10X50	10,0	16	50,0	110,0	16,0	6	45
12X30	12,0	16	30,0	90,0	16,0	6	45
12X50	12,0	18	50,0	110,0	18,0	6	45