


Kühlung	
Toleranz	-
Beschichtung	TiAlN- $\alpha$



HA K204083

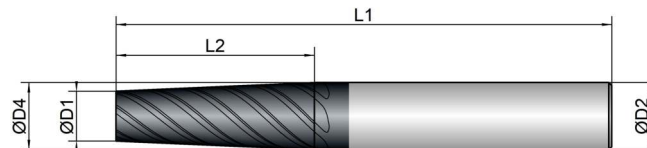

Stahl			Gehärteter Stahl				INOX (VA)	Guss	NE-Werkstoffe				Inconel	Abbrasivmaterial		Titan
< 850 N/mm	< 1100 N/mm	< 1400 N/mm	< 55 HRC	< 60 HRC	< 67 HRC	< 70 HRC			Alu	Kupfer	Mg	Kunststoffe		CFK / GFK	Grafit	
●	●	●					●	●	●							

K204083	D1  mm Ø	D4  mm Ø	L2  mm	L1  mm	D2  mm Ø	z  #	 °
2,5X20	2,5	6	20,0	65,0	6,0	4	30
3X28	3,0	8	28,0	70,0	8,0	4	30
3,5X30	3,5	10	30,0	80,0	10,0	4	30
4X30	4,0	10	30,0	80,0	10,0	6	45
4,5X30	4,5	10	30,0	80,0	10,0	6	45
5X30	5,0	12	30,0	84,0	12,0	6	45
5X40	5,0	12	40,0	100,0	12,0	6	45
6X30	6,0	12	30,0	93,0	12,0	6	45
6X55	6,0	16	55,0	110,0	16,0	6	45
8X30	8,0	14	30,0	90,0	14,0	6	45
8X50	8,0	18	50,0	114,0	18,0	6	45
10X30	10,0	16	30,0	93,0	16,0	6	45
10X55	10,0	20	55,0	115,0	20,0	6	45
12X30	12,0	18	30,0	93,0	18,0	6	45
12X45	12,0	20	45,0	100,0	20,0	6	45